


# Datasheet

**Vandal-proof 21.5" info screen incl. power cable, HDMI socket, mounting rail and remote control**

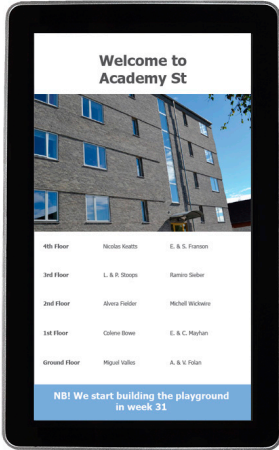

Info screen with sample display

Technical data	
Power supply	100 ~ 240ACV 50/60Hz
Maximum power consumption	30W
Standby power consumption	<1W
Operating temperature	0°C to 50°C
Storage temperature	-20°C to +60°C
Working humidity	10% ~ 85%
Storage humidity	5% ~ 95%
Lifetime	60,000hrs
Input and Output	
Composite video input	1(BNC x 1)
VGA	1
HDMI	1
Composite video output	1(BNC x 1)
Speaker	2x5W(9Ω)
Screen	
Panel size	21.5" LCD panel, LED backlight
Display area	475.2mm*267.3mm (16:9)
Color system	PAL/NTSC/SECAM
Maximum resolution	1920*1080
Display color	16.7M
Display angle	Horizontal or vertical display functionality
Pixel pitch	0.2475mm
Brightness	300d/m <sup>2</sup>
Contrast	1000*1
Visual angle	178°/178°
Response time	5ms
Remote controller	IR Remote Control
Screen menu display	
Menu language	Chinese/English
Housing	
Size	W: 50mm x L: 540mm x H: 330mm
Installation	Wall-mounting (horizontal or vertical)
Casing	Metal case SPCC
Tempered glass	Yes
Color	Black
Quality standard	ISO9001, CCC
Weight	5500g